

AIR IS LIFE

AIR IS COMFORT

AIR IS ENERGY

QUALITY AIR FOR LIFE

- Please read the Installation Instructions carefully before installing the unit, and the Operating Instructions before using it.
- Specifications are subject to change without prior notice.
- The contents of this catalogue are accurate as of March 2022.
- Due to printing considerations, the actual colours may vary slightly from those shown.
- All graphics are provided merely for the purpose of illustrating a point.



Do not add or replace refrigerant other than the specified type. Manufacturer is not responsible for the damage and deterioration in safety due to usage of other refrigerant.

22MSAC0301

Panasonic Australia Pty. Limited

1 Innovation Road,
Macquarie Park,
NSW 2113
ACN 001 592 187
ABN 83 001 592 187
Website : aircon.panasonic.com.au

Authorised Dealer

Panasonic

AIR CONDITIONING

Panasonic

**AIR CONDITIONING
R32 MULTI SPLIT SYSTEM**

COOLING | HEATING | AIR PURIFICATION

QUALITY AIR FOR LIFE

R32
REFRIGERANT

nanoeX



WLAN or Voice Control Ready

Remotely manage and monitor multiple air conditioning units or give voice commands to control air conditioning units with smart devices.

Google is a trademark of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

Voice Control
 •Network Adaptor required per indoor unit except Wall Mounted Z Series which has WLAN Adaptor built-in. Requires an Internet connection and the App downloaded from the App Store or GooglePlay Store on your smartphone or tablet with the latest Operating System available.
 •To use the Amazon Alexa to control your air conditioner, you will need a compatible Amazon Echo device.
 •To use the Google Assistant to control your air conditioner, you will need a compatible Google Assistant device.



Latest Refrigerant

One of Panasonic's principles has always been to sustain the environment around us. Therefore, we use the more ozone friendly refrigerant R32 for this new product. It is especially suitable for use in air conditioning and results in better energy efficiency.



Energy Saving Technology

Panasonic combines Inverter Technology and Economy Mode* to create a powerhouse energy saving product. These clever technologies benefit both the environment and your power bill, so your green intentions don't have to prevent you from living a comfortable life.

*Wall-mounted type only.



Clean and Healthy Air

The Panasonic nanoe™ X utilises next gen technology to inhibit the growth of bacteria, mould and viruses, and ensures quality air, for life.

Note: Selected types only - please refer to Page 7 for details.




Quiet Operation

Panasonic systems are amongst the quietest in the world, so you can enjoy the comfort of running your air conditioner at night and still have a relaxing sleep. The outdoor unit is also very quiet which means you don't have to worry about keeping your neighbours up either.



Aussie Temperatures

Our air conditioning systems boast an outstanding operating temperature range. Cooling operation is possible even when it is a scorching +46°C outside, which is perfect for Australia's hot summer days. The heating operation is designed to operate even when it's a freezing -15°C outside, ensuring even the coldest parts of Australia are comfortable.

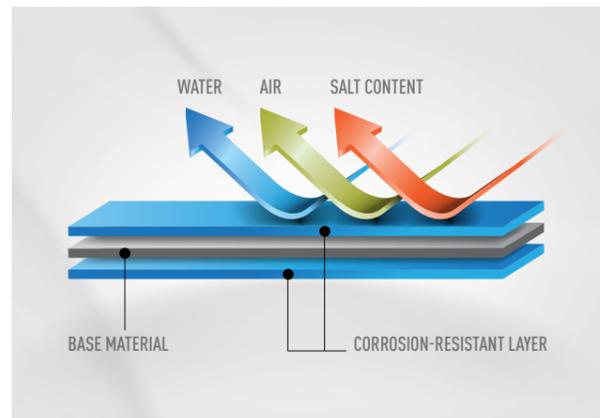

Built Tough - Blue Fin Condenser

Panasonic outdoor units are built to last in the harsh Australian environment. To ensure you will enjoy many years of reliable comfort from your air conditioner, the condenser fins are coated with a special blue coating that protects the unit from the damaging effects of salty air, dust, wind and rain.



Count on Panasonic

Panasonic air conditioners are manufactured to the highest quality standards to ensure years of reliable comfort. We even back our reliability by offering a full 5-year parts and labour warranty.

scan to see how nanoe™X works



PANASONIC'S ADVANCED 24 HOUR nanoe™X AIR PURIFICATION SYSTEM*

Panasonic's nanoe™X Technology is a revolutionary air purification system that keeps your living space fresh and clean for you and your family.



SENSITIVE CHOICE



Sensitive Choice is a community service program that aims to educate people about the importance of managing their asthma and allergies. Developed by the National Asthma Council Australia in 2006, the program also encourages companies to produce products and services that are more asthma and allergy aware.

Panasonic and Sensitive Choice have partnered to introduce nanoe™ X to the Australian market. Purifying your air 24 hours, the nanoe™X feature can function independently or concurrently with your air conditioner. This market leading Air Sterilisation technology works towards the inhibition of bacteria, viruses, allergens, pollens and mould within your indoor environment, whilst deodorising, keeping your home or office fresh and clean. Panasonic & Sensitive Choice are committed to bringing you Quality Air, for Life.

* The nanoe™X mode can be run independently from cooling or heating mode, and needs to be on for the 24 hour air purification to function.



THE SEVEN EFFECTS OF nanoe™X

nanoe™X technology effectively inhibits 5 types of pollutants and deodorises and moisturises with the benefits of hydroxyl radicals encapsulated in water.

DEODORISES	INHIBITS 5 TYPES OF POLLUTANTS					MOISTURISES
 Odours	 Bacteria & Viruses	 Mould	 Allergens	 Pollen	 Hazardous Substances	 Skin & Hair

nanoe™X available on selected models only – please see page 7 for details.

Compact and lightweight design to fit every building type

The multi-split system offers greater installation versatility and space-saving choices for houses with limited free space.



Multi-Split Air Conditioning System

Panasonic's multi-split air conditioning systems are designed to provide more space saving installation for outdoor units. A neater alternative to preserve the exterior appearance of buildings such as townhouses, single and multi-storey residences.

Space-Saving

Space-saving installation with less outdoor units required



1 outdoor unit connect to 1 indoor unit

1 outdoor unit connects up to 5 indoor units

• As 1 outdoor unit is able to connect up to 5 indoor units, this provides flexible customisation according to the layout of your house.

Independent Operation Control


Outdoor unit connects to each indoor unit independently



• Able to adjust the operation settings for each indoor unit separately. If one indoor unit malfunctions, other indoor units can continue to operate by provide cooling comfort to the rooms.

Flexible Installation

The multi-split system accommodates long pipelines up to 80 metres

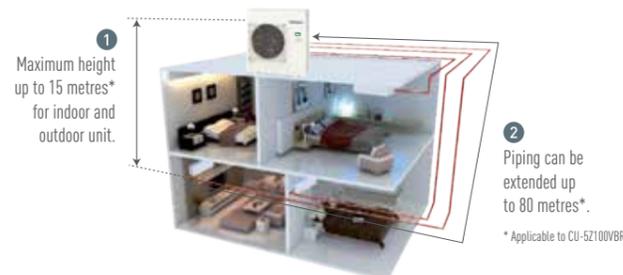

• Flexible arrangement and installation of indoor and outdoor units based on the room condition, location and installation convenience of the site.

WALL-MOUNTED – Z SERIES with nanoe™ X and Built-in Wi-Fi



Model No	CS-Z25XKRW	CS-Z35XKRW	CS-Z42XKRW	CS-Z50XKRW
Capacity	2.5kW	3.5kW	4.2kW ¹	5.0kW ¹
Model No	CS-Z60XKRW	CS-Z71XKRW		
Capacity	6.0kW ²	7.1kW ^{2,3}		

WALL-MOUNTED – RZ SERIES



Model No	CS-MRZ20WKR	CS-RZ25XKRW	CS-RZ35XKRW	CS-RZ42XKRW
Capacity	2.0kW	2.5kW	3.5kW	4.2kW ¹
Model No	CS-RZ50XKRW	CS-RZ60XKRW	CS-RZ71XKRW	
Capacity	5.0kW ¹	6.0kW ²	7.1kW ^{2,3}	

ULTRA SLIM DUCTED



Model No	CS-Z25UD3RAW	CS-Z35UD3RAW	CS-Z50UD3RAW	CS-Z60UD3RAW
Capacity	2.5kW	3.5kW	5.0kW ¹	6.0kW ²

MINI CASSETTE with nanoe™ X



Model No	S-25PY3E	S-36PY3E	S-50PY3E	S-60PY3E
Capacity	2.5kW ¹	3.5kW ¹	5.0kW ¹	6.0kW ²

MINI CASSETTE




Model No	CS-Z25UB4RAW	CS-Z35UB4RAW	CS-Z50UB4RAW	CS-Z60UB4RAW
Capacity	2.5kW	3.5kW	5.0kW ¹	6.0kW ²

FLOOR CONSOLE with nanoe™ X



Model No	CS-Z25UFRAW	CS-Z35UFRAW	CS-Z50UFRAW
Capacity	2.5kW	3.5kW	5.0kW ¹

¹ CZ-MA1PA is to be used to reduce the connection size on the indoor unit from 1/2" to 3/8". ² CZ-MA2PA is to be used to increase the connection size on the outdoor unit from 3/8" to 1/2".
³ CZ-MA3PA is to be used to reduce the connection size on the indoor unit from 5/8" to 1/2". ⁴ To enable demand response management, an optional accessory needs to be installed (CZ-CAP2).
⁵ To connect Panasonic Comfort Cloud App, the CZ-TACG1 accessory is required for WALL MOUNTED RZ SERIES, FLOOR CONSOLE, SLIM DUCTED and MINI CASSETTE, and CZ-RTC6BLW or CZ-CAPWFC1 is required for MINI CASSETTE with nanoe™ X.
 Built-in Wi-Fi is only available for WALL MOUNTED Z SERIES models. Function availability may vary depending on models.

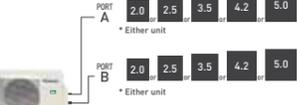MODEL	Indoor Units Combination Range	Refrigerant Pipe Diameter			Pipe Extension					Indoor Unit Combinations				
		Indoor Unit	Liquid Side (mm)	Gas Side (mm)	Maximum Pipe Length (1 room)	Maximum Pipe Length (Total)	Maximum Chargeless Length	Additional Gas	Maximum Height	Capacity [kW class]	Type	Wall-Mounted	Mini Cassette	Ultra Slim Ducted
CU-2Z52VBR INDOOR UNITS: Possible Combination Patterns Must be within capacity range  5.2kW #4 Dimensions (HxWxD): 619 x 824(+70) x 299 mm Weight: 39 kg * At least two indoor units must be connected.	3.2 to 7.7 kW	Room A	ø 6.35	ø 9.52	20 m	30 m	20 m	15 g/m	10 m	2.0	•*5			
										2.5	•	•	•	•
										3.5	•	•	•	•
										4.2	•			
										5.0	•	•	•	•
CU-3Z54VBR INDOOR UNITS: Possible Combination Patterns Must be within capacity range  5.4kW #4 Dimensions (HxWxD): 795 x 875(+95) x 320 mm Weight: 71 kg * At least two indoor units must be connected.	4.5 to 9.5 kW	Room A	ø 6.35	ø 9.52	25 m	50 m	30 m	20 g/m	15 m	2.0	•*5			
										2.5	•	•	•	
										3.5	•	•	•	
										4.2	•			
										5.0	•	•	•	
CU-4Z71VBR INDOOR UNITS: Possible Combination Patterns Must be within capacity range  7.1kW #4 Dimensions (HxWxD): 795 x 875(+95) x 320 mm Weight: 72 kg * At least two indoor units must be connected.	4.5 to 11.5 kW	Room A	ø 6.35	ø 9.52	25 m	60 m	30 m	20 g/m	15 m	2.0	•*5			
										2.5	•	•	•	
										3.5	•	•	•	
										4.2	•			
										5.0	•	•	•	
		Room B	ø 6.35	ø 9.52						2.0	•*5			
		Room C	ø 6.35	ø 9.52						2.5	•	•	•	
		Room D	ø 6.35	ø 9.52						3.5	•	•	•	
		Room E	ø 6.35	ø 9.52						4.2	•			
		Room F	ø 6.35	ø 9.52						5.0	•	•	•	

*4 To enable demand response management, an optional accessory needs to be installed [CZ-CAP2] *5 RZ Series only.

OUTDOOR UNIT

Up to 2 rooms



CU-2Z52VBR

Up to 3 rooms



CU-3Z54VBR

Up to 4 rooms



CU-4Z71VBR

MODEL	Indoor Units Combination Range	Refrigerant Pipe Diameter			Pipe Extension					Indoor Unit Combinations				
		Indoor Unit	Liquid Side (mm)	Gas Side (mm)	Maximum Pipe Length (1 room)	Maximum Pipe Length (Total)	Maximum Chargeless Length	Additional Gas	Maximum Height	Capacity [kW class]	Type	Wall-Mounted	Mini Cassette	Ultra Slim Ducted
CU-4Z80VBR INDOOR UNITS: Possible Combination Patterns Must be within capacity range  8.0kW #4 Dimensions (HxWxD): 999 x 940 x 340 mm Weight: 80 kg * At least two indoor units must be connected.	4.5 to 14.7 kW	Room A	ø 6.35	ø 9.52	25 m	70 m	45 m	20 g/m	15 m	2.0	•*5			
										2.5	•	•	•	
										3.5	•	•	•	
										4.2	•			
										5.0	•	•	•	
CU-5Z100VBR INDOOR UNITS: Possible Combination Patterns Must be within capacity range  10.0kW #4 Dimensions (HxWxD): 999 x 940 x 340 mm Weight: 81 kg * At least two indoor units must be connected.	4.5 to 18.3 kW	Room A	ø 6.35	ø 9.52	25 m	80 m	45 m	20 g/m	15 m	2.0	•*5			
										2.5	•	•	•	
										3.5	•	•	•	
										4.2	•			
										5.0	•	•	•	
		Room B	ø 6.35	ø 9.52						2.0	•*5			
		Room C	ø 6.35	ø 9.52						2.5	•	•	•	
		Room D	ø 6.35	ø 9.52						3.5	•	•	•	
		Room E	ø 6.35	ø 9.52						4.2	•			
		Room F	ø 6.35	ø 9.52						5.0	•	•	•	
		Room G	ø 6.35	ø 9.52						6.0	•	•	•	
		Room H	ø 6.35	ø 9.52						7.1	•			

*4 To enable demand response management, an optional accessory needs to be installed [CZ-CAP2] *5 RZ Series only.

ACCESSORIES



CZ-MA1PA
*1 CZ-MA1PA is to be used to reduce the connection size on the indoor unit from 1/2" to 3/8".



CZ-MA2PA
*2 CZ-MA2PA is to be used to increase the connection size on the outdoor unit from 3/8" to 1/2".



CZ-MA3PA
*3 CZ-MA3PA is to be used to reduce the connection size on the indoor unit from 5/8" to 1/2".



CZ-CAP2
*4 Demand response module CZ-CAP2.

OUTDOOR UNIT

Up to 4 rooms



CU-4Z80VBR

Up to 5 rooms



CU-5Z100VBR

INDOOR UNIT

MODEL		WALL-MOUNTED Z SERIES with nanoe™X and Built-in Wi-Fi					
		CS-Z25XKRW	CS-Z35XKRW	CS-Z42XKRW	CS-Z50XKRW	CS-Z60XKRW	CS-Z71XKRW
Capacity	kW	2.5	3.5	4.2	5.0	6.0	7.1
Power Source		Single Phase 240V, 50Hz					
Sound Pressure Level (H/L/Q-Lo)	Cooling	42/27/21	46/28/21	46/33/30	46/36/30	49/38/35	51/39/36
	Heating	42/29/23	46/31/24	46/34/30	46/36/30*	50/38/35	51/39/36
Sound Power Level (H/L/Q-Lo)	Cooling	58/43/37	62/44/37	62/49/46	62/52/46	65/54/51	67/55/52
	Heating	58/45/39	62/47/40	62/50/46	62/52/46*	66/54/51	67/55/52
Airflow	Cooling/Heating	188/200	193/202	193/202	208/228	328/338	352/367
Dimensions	Height	290	290	290	290	295	295
	Width	779	779	779	779	1,040	1,040
	Depth	209	209	209	209	244	244
Net Weight	kg	8	8	8	8	12	13
Refrigerant Pipe Diameter	Liquid Side	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35
	Gas Side	ø 9.52	ø 9.52	ø 9.52 ¹	ø 9.52 ¹	ø 12.70 ²	ø 12.70 ^{2,3}

*For connection to CU-Z25VBR, indoor Sound Pressure Level (Heating) is 46/35/31 and Sound Power Level (Heating) is 62/51/47.

MODEL		WALL-MOUNTED RZ SERIES						
		CS-MR220WKRW	CS-RZ25XKRW	CS-RZ35XKRW	CS-RZ42XKRW	CS-RZ50XKRW	CS-RZ60XKRW	CS-RZ71XKRW
Capacity	kW	2.0	2.5	3.5	4.2	5.0	6.0	7.1
Power Source		Single Phase 240V, 50Hz						
Sound Pressure Level (H/L/Q-Lo)	Cooling	42/27/24	42/27/21	46/28/21	46/33/30	46/36/30	49/38/35	51/39/36
	Heating	42/29/26	42/29/23	46/31/24	46/34/30	46/36/30*	50/38/35	51/39/36
Sound Power Level (H/L/Q-Lo)	Cooling	58/43/40	58/43/37	62/44/37	62/49/46	62/52/46	65/54/51	67/55/52
	Heating	58/45/42	58/45/39	62/47/40	62/50/46	62/52/46*	66/54/51	67/55/52
Airflow	Cooling/Heating	188/198	188/200	193/202	193/202	208/228	328/338	352/367
Dimensions	Height	290	290	290	290	290	295	295
	Width	779	779	779	779	779	1,040	1,040
	Depth	209	209	209	209	209	244	244
Net Weight	kg	8	8	8	8	8	12	13
Refrigerant Pipe Diameter	Liquid Side	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35
	Gas Side	ø 9.52	ø 9.52	ø 9.52	ø 9.52 ¹	ø 9.52 ¹	ø 12.70 ²	ø 12.70 ^{2,3}

*For connection to CU-Z25VBR, indoor Sound Pressure Level (Heating) is 46/35/31 and Sound Power Level (Heating) is 62/51/47.

MODEL		MINI CASSETTE with nanoe™X				MINI CASSETTE			
		S-25PY3E	S-36PY3E	S-50PY3E	S-60PY3E	CS-Z25UB4RAW	CS-Z35UB4RAW	CS-Z50UB4RAW	CS-Z60UB4RAW
Capacity	kW	2.5	3.5	5.0	6.0	2.5	3.5	5.0	6.0
Power Source		Single Phase 240V, 50Hz							
Sound Pressure Level (H/L)	Cooling	33/27	36/27	41/29	45/33	36/27	36/28	40/30	45/34
	Heating	33/27	36/27	41/29	45/33	37/30	39/30	41/31	47/34
Sound Power Level (H)	Cooling	48	51	56	60	52	52	56	61
	Heating	48	51	56	60	53	55	57	63
Airflow	Cooling/Heating	142/142	158/158	200/200	233/233	175/180	175/195	192/197	237/253
Dimensions Unit (Fascia Panel)	Height	243 (30)	243 (30)	243 (30)	243 (30)	260 (51)	260 (51)	260 (51)	260 (51)
	Width	575 (625)	575 (625)	575 (625)	575 (625)	575 (700)	575 (700)	575 (700)	575 (700)
	Depth	575 (625)	575 (625)	575 (625)	575 (625)	575 (700)	575 (700)	575 (700)	575 (700)
Net Weight	kg	15	15	15	15	18	18	18	18
Refrigerant Pipe Diameter	Liquid Side	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35
	Gas Side	ø 9.52 ¹	ø 9.52 ¹	ø 9.52 ¹	ø 12.70 ²	ø 9.52	ø 9.52	ø 9.52 ¹	ø 12.70 ²

*1 CZ-MA1PA is to be used to reduce the connection size on the indoor unit from 1/2" to 3/8".
 *2 CZ-MA2PA is to be used to increase the connection size on the outdoor unit from 3/8" to 1/2".
 *3 CZ-MA3PA is to be used to reduce the connection size on the indoor unit from 5/8" to 1/2".

INDOOR UNIT

MODEL		ULTRA SLIM DUCTED				FLOOR CONSOLE with nanoe™X		
		CS-Z25UD3RAW	CS-Z35UD3RAW	CS-Z50UD3RAW	CS-Z60UD3RAW	CS-Z25UFRAW	CS-Z35UFRAW	CS-Z50UFRAW
Capacity	kW	2.5	3.5	5.0	6.0	2.5	3.5	5.0
Power Source		Single Phase 240V, 50Hz						
Sound Pressure Level (H/L)	Cooling	35/29	35/28	41/31	43/32	40/27	41/28	46/33
	Heating	36/29	37/29	41/32	43/34	40/27	41/27	48/35
Sound Power Level (H)	Cooling	51	51	57	59	56	57	62
	Heating	52	53	57	59	56	57	64
Airflow	Cooling/Heating	175/175	187/187	255/255	262/262	163/173	170/182	198/227
Dimensions	Height	200	200	200	200	600	600	600
	Width	750	750	750	750	750	750	750
	Depth	640	640	640	640	207	207	207
Net Weight	kg	19	19	19	19	13	13	13
Refrigerant Pipe Diameter	Liquid Side	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35
	Gas Side	ø 9.52	ø 9.52	ø 9.52 ¹	ø 12.70 ²	ø 9.52	ø 9.52	ø 9.52 ¹

OUTDOOR UNIT

MODEL		(50Hz)	CU-Z25VBR	CU-Z35VBR	CU-Z71VBR	CU-Z80VBR	CU-Z100VBR
			Single Phase 240V, 50Hz				
Power Source	Single Phase 240V, 50Hz						
Cooling Operation	Capacity (min-max)	kW	5.20 (1.50-6.00)	5.40 (1.80-7.30)	7.10 (1.90-8.80)	8.00 (2.30-9.20)	10.00 (2.30-11.50)
Maximum Connectable Capacity		kW	7.7	9.5	11.5	14.7	18.3
Maximum Connectable Indoors		Units	2	3	4	4	5
Electrical Data	Running Current	A	5.9	5.1	7.4	8.9	11.8
	Power Input (min-max)	kW	1.35 (0.25-1.62)	1.12 (0.36-2.18)	1.66 (0.34-2.47)	1.98(0.42-2.87)	2.60 (0.43-3.59)
	AEER/EER	W/W	3.79 / 3.85	4.74 / 4.82	4.23 / 4.28	4.00 / 4.04	3.81 / 3.85
Noise (H)	Sound Pressure Level	dB(A)	51	48	49	51	53
	Sound Power Level	dB(A)	66	62	63	67	69
Heating Operation	Capacity	kW	6.10 (1.10-7.20)	7.00 (1.60-9.00)	8.50 (3.00-10.70)	9.40 (3.00-11.60)	12.00 (3.40-14.50)
Electrical Data	Running Current	A	6.2	6.8	8.6	9.3	12.1
	Power Input (min-max)	kW	1.43 (0.21-1.90)	1.54 (0.32-2.63)	1.95 (0.50-2.72)	2.03 (0.50-3.42)	2.76 (0.58-4.02)
	ACOP/COP	W/W	4.21 / 4.27	4.49 / 4.55	4.32 / 4.36	4.58 / 4.63	4.31 / 4.35
Noise (H)	Sound Pressure Level	dB(A)	53	49	51	52	56
	Sound Power Level	dB(A)	68	63	65	68	72
Maximum Current		A	11.5	15.2	15.6	19.0	21.3
Starting Current		A	6.4	7.0	8.8	9.7	12.5
Compressor Output		W	900	1300	1300	1700	1700
Dimensions	Height	mm	619	795	795	999	999
	Width	mm	824 (+70)	875 (+95)	875 (+95)	940	940
	Depth	mm	299	320	320	340	340
Net Weight		kg	39	71	72	80	81
Power Supply			Outdoor	Outdoor	Outdoor	Outdoor	Outdoor
Pipe Length Range (1 room)		m	3-20	3-25	3-25	3-25	3-25
Maximum Pipe Length (Total) **		m	30	50	60	70	80
Refrigerant Pipe Diameter	Liquid Side	mm	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35
	Gas Side	mm	ø 9.52	ø 9.52	ø 9.52	ø 9.52	ø 9.52
Operating Range	Cooling	[°C]	-10~+46	-10~+46	-10~+46	-10~+46	-10~+46
	Heating	[°C]	-15~+24**	-15~+24**	-15~+24**	-15~+24**	-15~+24**

** Additional Gas might be required for some models, refer to Technical Manual for details.

Rating Conditions

	Cooling	Heating
Inside air temperature	27°C DB / 19°C WB	20°C DB
Outside air temperature	35°C DB	7°C DB / 6°C WB